This Page Is Inserted by IFW Operations and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

As rescanning documents will not correct images, please do not report the images to the Image Problem Mailbox.



60/027,631

US

Filed on

WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

WO 98/14134 (51) International Patent Classification 6: (11) International Publication Number: **A3** A61B 17/04 9 April 1998 (09.04.98) (43) International Publication Date:

(81) Designated States: DE, DE (Utility model), GB, JP, US. PCT/US97/17987 (21) International Application Number:

3 October 1997 (03.10.97) (22) International Filing Date: Published (30) Priority Data: With international search report. US

Not furnished (CIP)

Not furnished

4 October 1996 (04.10.96)

(88) Date of publication of the international search report: 1 October 1998 (01.10.98) (63) Related by Continuation (CON) or Continuation-in-Part (CIP) to Earlier Application

(71) Applicants (for all designated States except US): ETHICON, INC. [US/US]; P.O. Box 151, Sommerville, NJ 08816 (US). PRODESCO, INC. [US/US]; 700 Park Avenue, P.O. Box 237, Perkasie, PA 18944 (US).


(72) Inventors; and (75) Inventors/Applicants (for US only): D'AVERSA, Margaret, M. [US/US]; 33 Railroad Avenue, Whitehouse Station, NJ 08889 (US). DOUGHERTY, Robert [US/US]; 4996 Elderberry Drive, Reading, PA 19606 (US).

(74) Agent: GOLUB, Daniel, H.; Reed Smith Shaw & McClay, 1650 Market Street, 2500 One Liberty Place, Philadelphia, PA 19103 (US).

(54) Title: KNITTED SURGICAL MESH

(57) Abstract

This invention is a knitted surgical mesh (10) formed from a yarn. The knitted mesh has from 11 courses per inch to 13 courses per inch, and from 8 wales per inch to 10 wales per inch, a flexibility of from 10 gfcm/cm to 16 gfcm/cm, a burst strength greater than 175 pounds per square inch, and a pore size percentage greater than 37 %.

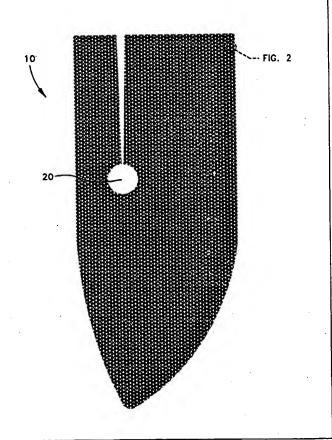

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

A Y	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AL	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AM		FR	France	LU	Luxembourg	SN	Senegal
AT	Austria	GA	Gabon	LV	Latvia	SZ	Swaziland
AU	Australia	GB	United Kingdom	MC	Monaco	TD	Chad
AZ	Azerbaijan	GE	•	MD	Republic of Moldova	TG	Togo
BA	Bosnia and Herzegovina		Georgia Ghana	MG	Madagascar	TJ	Tajikistan
BB	Barbados	GH	•	MK	The former Yugoslav	TM	Turkmenistan
BE	Belgium	GN	Guinea	14114	Republic of Macedonia	TR	Turkey
BF	Burkina Faso	GR	Greece	ML	Mali	TT	Trinidad and Tobago
BG	Bulgaria	HU	Hungary			UA	Ukraine
BJ	Benin	IE	Ireland	MN	Mongolia	UG	Uganda
BR	Brazil	IL	Israel	MR	Mauritania	US	United States of America
BY	Belarus	IS	Iceland	MW	Malawi	UZ	Uzbekistan
CA	Canada	IT	Italy	MX	Mexico		
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	Yυ	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	zw	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI .	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

INTERNATIONAL SEARCH REPORT

International application No. PCT/US97/17987

A. CLASSIFICATION OF SUBJECT MATTER IPC(6) :A61B 17/04							
US CL :606/151							
According to International Patent Classification (IPC) or to both national classification and IPC B. FIELDS SEARCHED							
	ocumentation searched (classification system followe	d by classification symbols)					
U.S. :	606/151						
Documenta	tion searched other than minimum documentation to the	e extent that such documents are included	in the fields searched				
Electronic	data base consulted during the international search (no	ome of data have and where practicable	search terms used)				
APS	ista pasa conserior daring no momentum societi (iii		, 				
C. DOC	CUMENTS CONSIDERED TO BE RELEVANT						
Category*	Citation of document, with indication, where ap	propriate, of the relevant passages	Relevant to claim No.				
Y	US 4,452,245 A (USHER) O5 JUNE	1984, TABLES I AND II.	1-10				
Y	US 4,655,221 A (DEVEREUX) O7 APRIL 1987, SEE COL. 6.						
Y, P	P US 5,569,273 A (TITONE ET AL) 29 OCTOBER 1996, ENTIRE 1-10						
	·	7					
	, i						
			,				
	+						
			*				
			:				
Furt	her documents are listed in the continuation of Box C	See patent family annex.					
Special categories of cited documents: T' later document published after the international filing date or priority date and not in conflict with the application but cited to understand.							
	coment defining the general state of the art which is not considered be of particular relevance	the principle or theory underlying the *X* document of particular relevance; the					
	rlier document published on or after the international filing data soument which may throw doubts on priority claim(s) or which is	"X" document of particular relevance; the considered novel or cannot be considered when the document is taken alone					
cit	cited to establish the publication date of enother citation or other special research (as specified) "Y" document of particular relevance; the claimed invention cannot be						
	O document referring to an oral disclosure, use, exhibition or other combined with one or more other such document, such combination being obvious to a person skilled in the art						
P document published prior to the international filing date but later than *&* document member of the same patent family the priority date claimed							
Date of the actual completion of the international search O2 MARCH 1998 Date of mailing of the international search report O 8 JUN 1998							
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 QARY JACKSON							
_	Facaimile No. (703) 305-3230 Telephone No. (703) 308-4302						

WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau




(51) International Patent Classification ⁶ :		(11) International Publication Number:	WO 98/14134	
A61F	A2	(43) International Publication Date:	9 April 1998 (09.04.98)	
(21) International Application Number: PCT/US9	97/179	(81) Designated States: DE, DE (Utility	model), GB, JP, US.	
(22) International Filing Date: 3 October 1997 (0 (30) Priority Data: 60/027,631 4 October 1996 (04.10.96)		Published Without international search requipon receipt of that report.	port and to be republished	
(71) Applicants (for all designated States except US): ET INC. [US/US]; P.O. Box 151, Sommerville, NJ 088 PRODESCO, INC. [US/US]; 700 Park Avenue, P 237, Perkasie, PA 18944 (US).	116 (U	5).		
(72) Inventors; and (75) Inventors/Applicants (for US only): D'AVERSA, M. M. [-/US]; 33 Railroad Avenue, Whitehouse Sta 08889 (US). DOUGHERTY, Robert [-/US]; 499 berry Drive, Reading, PA 19606 (US).	ition, l	4 1		
(74) Agent: GOLUB, Daniel, H.; Reed Smith Shaw & 1650 Market Street, 2500 One Liberty Place, Phila PA 19103 (US).	McCla adelph	y, ia,		
			· · · · · · · · · · · · · · · · · · ·	

(54) Title: KNITTED SURGICAL MESH

(57) Abstract

A knitted surgical mesh formed from a yarn. The knitted mesh has from 11 to 13 courses per inch and from 8 to 10 wales per inch, a flexibility of from 10 to 16 gfcm/cm, a burst strength grater than 175 pounds per square inch, and a pore size percentage greater than 37 %.

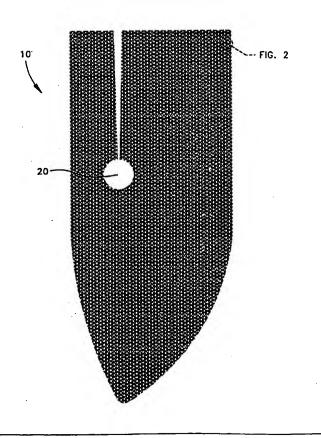

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia	
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia	
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal	
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland	
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad	
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo	
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan	
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan	
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey	
BG	Bulgaria	HU	Hungary	ML	Mali .	TT	Trinidad and Tobago	
ВJ	Benin	Œ	Ireland	MN	Mongolia	ÙA	Ukraine	
BR	Brazil	IL	Israel	MR	Mauritania	UG	. Uganda	
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America	
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan	
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam	
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia	
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	zw	Zimbabwe	
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand			
CM	Cameroon		Republic of Korea	PL	Poland			
CN	China	KR	Republic of Korea	PT	Portugal			
CU	Cuba	KZ	Kazakstan	RO	Romania			
cz	Czech Republic	LC	Saint Lucia	RU	Russian Federation			
DE	Germany	LI	Liechtenstein	SD	Sudan			
DK	Denmark	LK	Sri Lanka	SE	Sweden			
EE	Estonia	LR	Liberia	SG	Singapore			
~~					- •			

KNITTED SURGICAL MESH

Field of the Invention

This invention relates to a textile material and, in particular, to a surgical mesh of knit construction fabricated from a polypropylene monofilament yarn.

5

10

15

Background

Hernia repairs are among the more common surgical operations which may employ a mesh fabric prosthesis. Such mesh fabric prostheses are also used in other surgical procedures including the repair of anatomical defects of the abdominal wall, diaphragm, and chest wall, correction of defects in the genitourinary system, and repair of traumatically damaged organs such as the spleen, liver or kidney.

Mesh fabrics for use in connection with hernia repairs are disclosed in U.S. Patent Nos. 5,292,328, 4,769,038 and 2,671,444. Knitted and woven fabrics constructed from a variety of synthetic fibers and the use of the fabrics in surgical repair are also discussed in U.S. Patent Nos. 3,054,406; 3,124,136; 4,193,137; 4,347,847; 4,452,245; 4,520,821; 4,633,873; 4,652,264; 4,655,221; 4,838,884; 5,002,551; and European Patent Application No. 334,046.

20

It is desirable for a surgical mesh fabric prosthesis to exhibit certain properties and characteristics. In particular, the mesh should have a burst strength sufficient to ensure that the mesh does not break or tear after insertion into a patient. The mesh should also have a pore size which allows tissue to penetrate or "grow through" the

mesh, after the mesh has been inserted into a patient. In addition, the mesh should be constructed so as to maximize its flexibility, thereby facilitating the insertion of the mesh prosthesis into a patient during a surgical operation.

It is an object of the present invention to provided a knitted surgical mesh having a high burst strength and large pore size, which has a greater flexibility than known knitted surgical mesh fabrics.

These and other objects and advantages of the invention will become more fully

apparent from the description and claims which follow or may be learned by the practice

of the invention.

Summary Of The Invention

The present invention is directed to a knitted surgical mesh formed from a yarn.

The knitted mesh has from 11 to 13 courses per inch and from 8 to 10 wales per inch, a flexibility of from 10 to 16 gfcm/cm, a burst strength greater than 175 pounds per square inch, and a pore size percentage greater than 37%.

Brief Description Of The Drawings

In order that the manner in which the above-recited and other advantages and objects of the invention are obtained and can be appreciated, a more particular description of the invention briefly described above will be rendered by reference to a specific embodiment thereof which is illustrated in the appended drawings.

Understanding that these drawings depict only a typical embodiment of the invention and are not therefore to be considered limiting of its scope, the invention and the presently understood best mode thereof will be described and explained with additional specificity and detail through the use of the accompanying drawings.

10

5

Figure 1 is a diagram showing a knitted surgical mesh, in accordance with a preferred embodiment of the present invention.

Figure 2 is an enlarged view of a portion of the surgical mesh shown in Figure 1.

15

20

Description Of The Preferred Embodiments

The surgical mesh of this invention is preferably fabricated from a yarn which is already accepted for use as a suture material. In a preferred embodiment, the surgical mesh is fabricated from a monofilament yarn formed from a polypropylene resin, such as that disclosed in U.S. Patent No. 4, 911,165, entitled "Pliablized Polypropylene Surgical Filaments" and assigned to Ethicon, Inc., the contents of which is hereby incorporated in its entirety by reference. The preferred monofilament polypropylene yarn used has a denier of from about 30 to 300, and more preferably a denier of about 141.

Alternatively, a multifilament yarn, such as a multifilament polypropylene yarn may be used to fabricate a surgical mesh in accordance with the present invention. In still further alternate embodiments, the yarn used to form the mesh may be formed from silk, linen, cotton, nylon, polyester (i.e., polyethelene terathalate, polybutulene terathalate, and mixtures thereof), polyethylene, stainless steel, hydrolytic polymers, such as those which may derived from lactone monomers, including but not limited to glycolide and lactide (including acid forms thereof), 1,4 dioxin, trimethylene carbonate, Δ -valero lactone, ε -caprolactone, 1,4 dioxepan-2-1, 1,5 dioxepan-2-1, and alkyl substituted equivalents of these compounds, as well as the cyclic dimers of these compounds.

The surgical mesh of this invention is preferably fabricated from a 141 denier monofilament polypropylene yarn by employing known and conventional warp knitting apparatus and techniques, such as the tricot and Raschel knitting machines and procedures described in "Warp Knitting Production" by Dr. S. Raz, Melliand

Textilberichte GmbH, Rohrbacher Str. 76, D-6900 Heidelberg, Germany (1987), the contents of which are incorporated by reference herein. As is well known in the art of warp knitting, the number of courses and wales per inch in a knitted material is affected by a number of machine operating variables such as the rate at which the fabric is drawn away from the needles, the number of needles per inch, the amount of tension applied to the warp yarns and other variables after the fabric leaves the machine, e.g., the heat setting conditions. In the preferred embodiment of the present invention, the preferred polypropylene monofilament yarn described above is warp knitted, preferably tricot knitted on a 2 bar set-up, in accordance with the parameters set forth in Table I below:

TABLE I

Courses per Inch	Wales per Inch	Back Bar	Front Bar
11-13	8-10	2/3	1/2
		1/0	1/0

Following knitting, the mesh is cleaned or scoured, and thereafter annealed to stabilize the fabric. For the latter operation, the mesh can be secured to a tenter frame which maintains the mesh at a predetermined width, the frame then being passed through an elongate heating zone at a temperature of from about 100° to about 160° C, preferably at a temperature of from about 120° to about 150° C, at a rate providing a dwell time of from about 1 to about 60 minutes and preferably from about 5 to about 25 minutes.

Following heat setting, the mesh is cut to size, packaged and sterilized.

10

15

20

The mesh can be cut to any desired configuration, e.g., a square or rectangular shape, of appropriate dimensions. A preferred configuration 10 having a key-hole opening 20 is shown in Fig. 1. An ultrasonic slitter may be employed to cut the mesh, various types of which are commercially available. Unlike the result one obtains when cutting with a blade, i.e., frayed yarn ends, or when the yarn ends are heat-sealed, i.e., bead-like formations, cutting the mesh to size with an ultrasonic cutter avoids both frayed and beaded ends.

The polypropylene monofilament knitted mesh fabricated as described above exhibits high flexibility. Depending on the yarn used to form the mesh, a mesh formed

in accordance with Table I above preferably has a flexibility of about 10 to 16 gramforce-cm/cm and, when the 141 denier monofilament yarn described above is used, the mesh has a flexibility of 14.7 gfcm/cm. In addition, depending on the yarn used to form the mesh, a mesh formed in accordance with Table I above preferably has a burst strength of about 175-250 pounds per square inch and, when the 141 denier 5 monofilament yarn described above is used, the mesh has a mean burst strength of 223 pounds per square inch which varies between about 210 to 234 pounds per square inch depending on the sample. Finally, depending on the yarn used to form the mesh, a mesh formed in accordance with Table I above preferably has a pore size percentage of from about 37% to 50%, and, when the 141 denier monofilament yarn described above is used, 10 the mesh has a pore size of about 42%. The polypropylene monofilament knitted mesh fabricated as described above preferably possesses a thickness of from 20 to 30 mils depending on the particular yarn used, and, when the 141 denier monofilament yarn described above is used, the mesh has a mean thickness of 24.7 mils which varies between about 24 to 25 mils depending on the sample. The flexibility, burst strength and 15 pore size characteristics for a mesh fabric fabricated as described above and other meshes that are currently commercially available are compared in Table II set forth below:

TABLE II

Mesh Fabric	Flexibility (gf cm/cm)	Burst Strength (PSI)	Pore Size (%)	Thickness (Mils)
Present Invention	14.73	223	42.0	24.7
Marlex Mesh (mfd. by C.R. Bard)	14.86	148	31.71	25.9
Prolene Mesh (mfd. by Ethicon, Inc.)	18.92	241	49.73	29.0

As shown in Table II, the mesh of the present invention has: (i) a significantly better flexibility than the Prolene mesh fabric, and (ii) a significantly higher burst strength and pore size percentage than the Marlex mesh fabric. The mesh of the present invention thus achieves a flexibility which is slightly better than the Marlex mesh material while, at the same time, exhibiting burst strength and pore size characteristics which are comparable to the less-flexible Prolene material.

5

10

Furthermore, it is to be understood that although the present invention has been described with reference to a preferred embodiment, various modifications, known to those skilled in the art, may be made to the structures and process steps presented herein without departing from the invention as recited in the several claims appended hereto.

What is claimed is:

1. A knitted surgical mesh comprised of a knitted yarn, the knitted mesh having from 11 to about 13 courses per inch and from 8 to 10 wales per inch, a flexibility of from 10 to 16 gfcm/cm, a burst strength greater than 175 pounds per square inch, and a pore size percentage greater than 37 %.

- 2. The knitted surgical mesh of claim 1, wherein the pore size percentage of the mesh is from 37 % to 50 %.
- The knitted surgical mesh of claim 2, wherein the pore size percentage of the mesh is 42%.
 - 4. The knitted surgical mesh of claim 1, wherein the mesh has a burst strength from 210 to 234 pounds per square inch.

15

5

- 5. The knitted surgical mesh of claim 1, wherein the mesh has a thickness of from 20 to 30 mils.
- 6. The knitted surgical mesh of claim 5, wherein the thickness of the mesh is
 from 24 to 25 mils.
 - 7. The surgical mesh of claim 1, wherein the yarn is a polypropylene yarn.

8. The surgical mesh of claim 7, wherein the yarn is a monofilament polypropylene yarn.

5

- 9. The surgical mesh of claim 8, wherein the yarn has a denier of from 30 to 300.
- 10. The surgical mesh of claim 1, wherein the mesh includes a key-hole shaped opening within an interior region of the mesh.

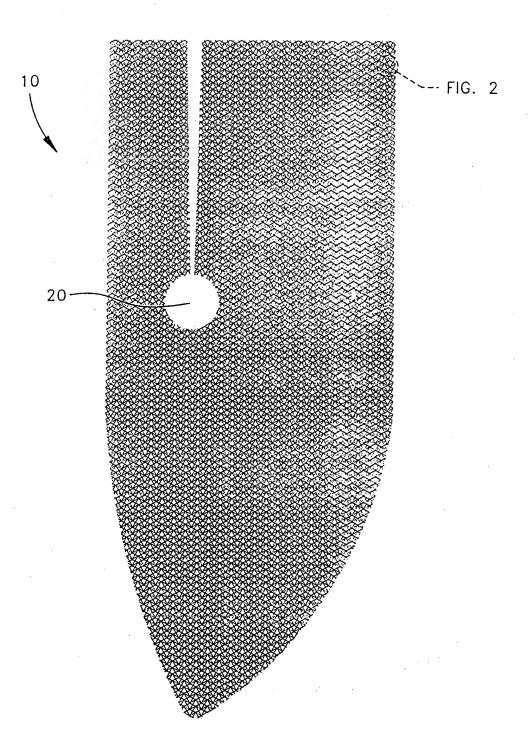


FIG. 1




FIG. 2